



ACS Material Equipment Series

PressPro™ Vacuum Automatic Hot Press Machine

(EPHXAZ Series)

- 1 – Product Composition
- 2 – Product Features
- 3 – Product Specifications

Contact Information:

ACS Material, LLC

Address: 959 E Walnut St., Suite 100

Pasadena, CA 91106, USA

Phone: (866) 227-0656

Fax: (781) 518-0284

E-Mail: contact@acsmaterial.com

Revision: 061924

I. Product Composition

1) Main Machine

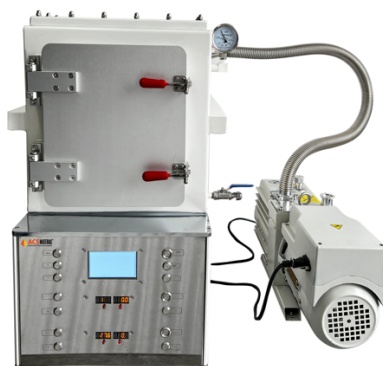


Photo of Vacuum Hot Press Machine

II. Product Features

Based on the automatic hot press machine, this new tool has been developed to conduct hot press experiments on samples in a vacuum environment. The close integration of the hot press plate with the vacuum chamber (or vacuum glove box) allows the vacuum degree to reach -0.1MPa, meeting the experimental requirements of users in a vacuum environment.

III. Product Specifications

Product Name	PressPro™ Vacuum Automatic Hot Press Machine		
Model	EPHXAZ01	EPHXAZ02	EPHXAZ03
Pressure Range	0-25T/0.01t		0-30T / 0.01t
Pressurization Method	Automatic pressurization / automatic gradual pressurization		
Sample Pressure Process	Automatic pressurization – Automatic pressure holding – Precise pressure compensation – Timed pressure release		
Pressurization Stages	5 stages		
Pressurization Time	Unlimited seconds, configurable per stage		
Mold Pressure Conversion	Real-time automatic calculation of sample pressure (MPa)		
Control Interface	7-inch touch LCD screen (remote control optional) Pressure display - Temperature control system – Data management system		
Vacuum Degree	-0.1MPa		

Temperature Control System	Programmable with 5-stage heating – Automatic heating and insulation – Natural cooling		
Insulation Time	Unlimited seconds, configurable per stage		
Hot Pressing Plate Type	Dual flat plate heating and pressing, upper plate suspended by threaded rod/polished surface plate.		
Heating Temperature	Room temperature to 300°C (0.1°C increments)		
Heating Core Material	Aluminum		
Hot Pressing Plate Cooling Method	Natural cooling (optionally available with air/water cooling chiller)		
Insulation Method	Imported insulation plate		
Pressure Safety Configuration	Automatic pressure release when the system pressure exceeds the safety value + emergency stop switch		
High-temperature Safety Configuration	When mold temperature exceeds 50°C, temperature controller automatically signals “Caution: Hot Surface”		
Power Supply	220V (50Hz/60Hz) with leakage protector		
Hot Pressing Plate Size	180×180mm	200×200mm	300×300mm
Workspace	W 180×65 mm	W 200×65 mm	W 300×65 mm
Maximum Power	2200W (900W*2+100W+300W)		2800W
Weight	190-200kg	200-210kg	400-420kg
Configuration Description	This is a custom product on demand. Includes 1 main machine. Optional vacuum pump.		

Disclaimer: ACS Material, LLC believes that the information in this Technical Data Sheet is accurate and represents the best and most current information available to us. ACS Material makes no representations or warranties either express or implied, regarding the suitability of the material for any purpose or the accuracy of the information contained within this document. Accordingly, ACS Material will not be responsible for damages resulting from use of or reliance upon this information.